
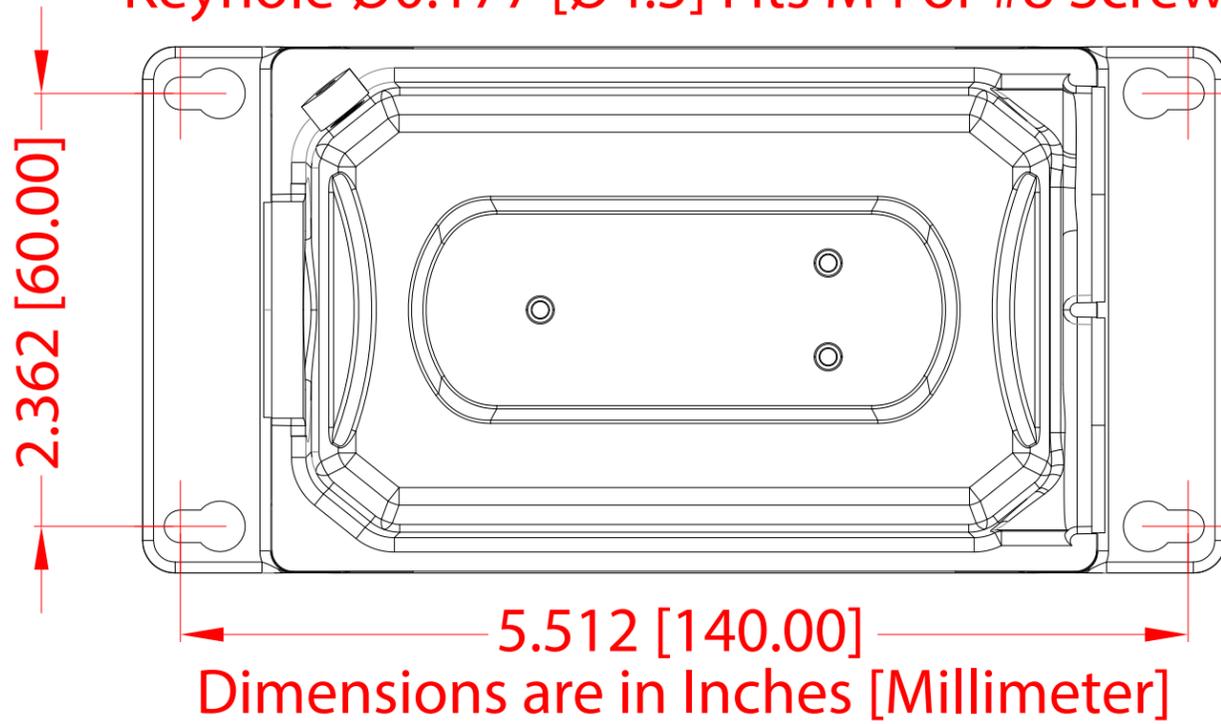



Drill Bit Size for Plastic Ribbed Anchors: 7/32"
Keyhole Ø0.177 [Ø4.5] Fits M4 or #8 Screw



Parts

<p>(1) 2-Port IP67 802.3bt to 802.3at PoE Gigabit Switch Assembly</p> 	<p>(3) Cable Glands</p> 	<p>(1) Wrench</p> 	<p>(1) Ground wire</p> 	<p>Screw Accessory Kit (4) Anchors  (4) Screws </p>
---	---	---	--	--

Typical Installation

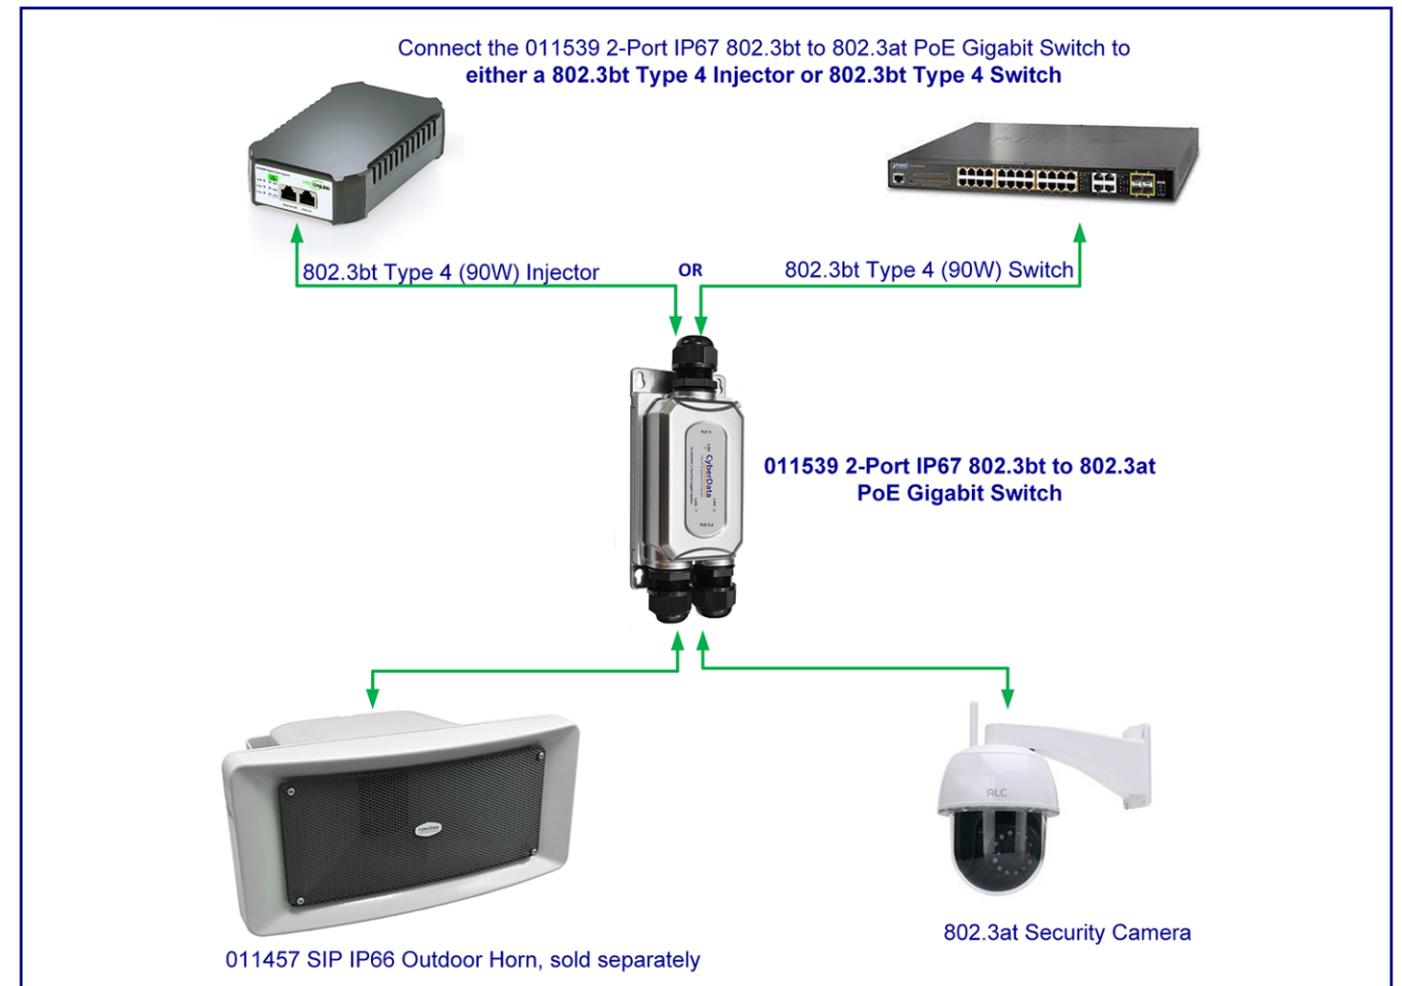

Contacting CyberData

Corporate Headquarters


CyberData Corporation
 3 Justin Court
 Monterey, CA 93940, USA

Phone: 831-373-2601
 Fax: 831-373-4193


<http://www.cyberdata.net/>

Sales: 831-373-2601 ext. 334
 Support: 831-373-2601 ext. 333
 Support Website: <http://support.cyberdata.net/>
 RMA Department: 831-373-2601 ext. 136
 RMA Email: RMA@CyberData.net
 RMA Status: <http://support.cyberdata.net/>
 Warranty Information: <http://support.cyberdata.net/>

Dimensions

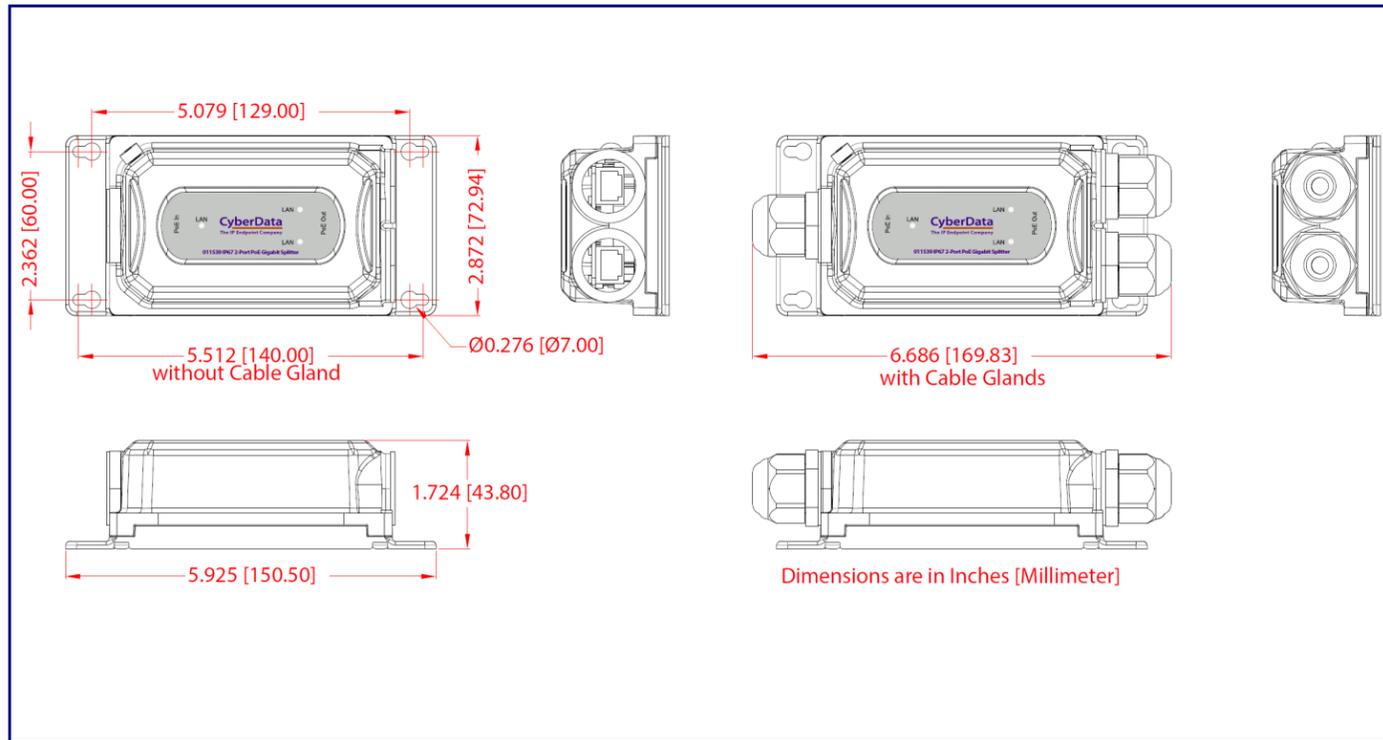

IP67 Cable Gland Detail

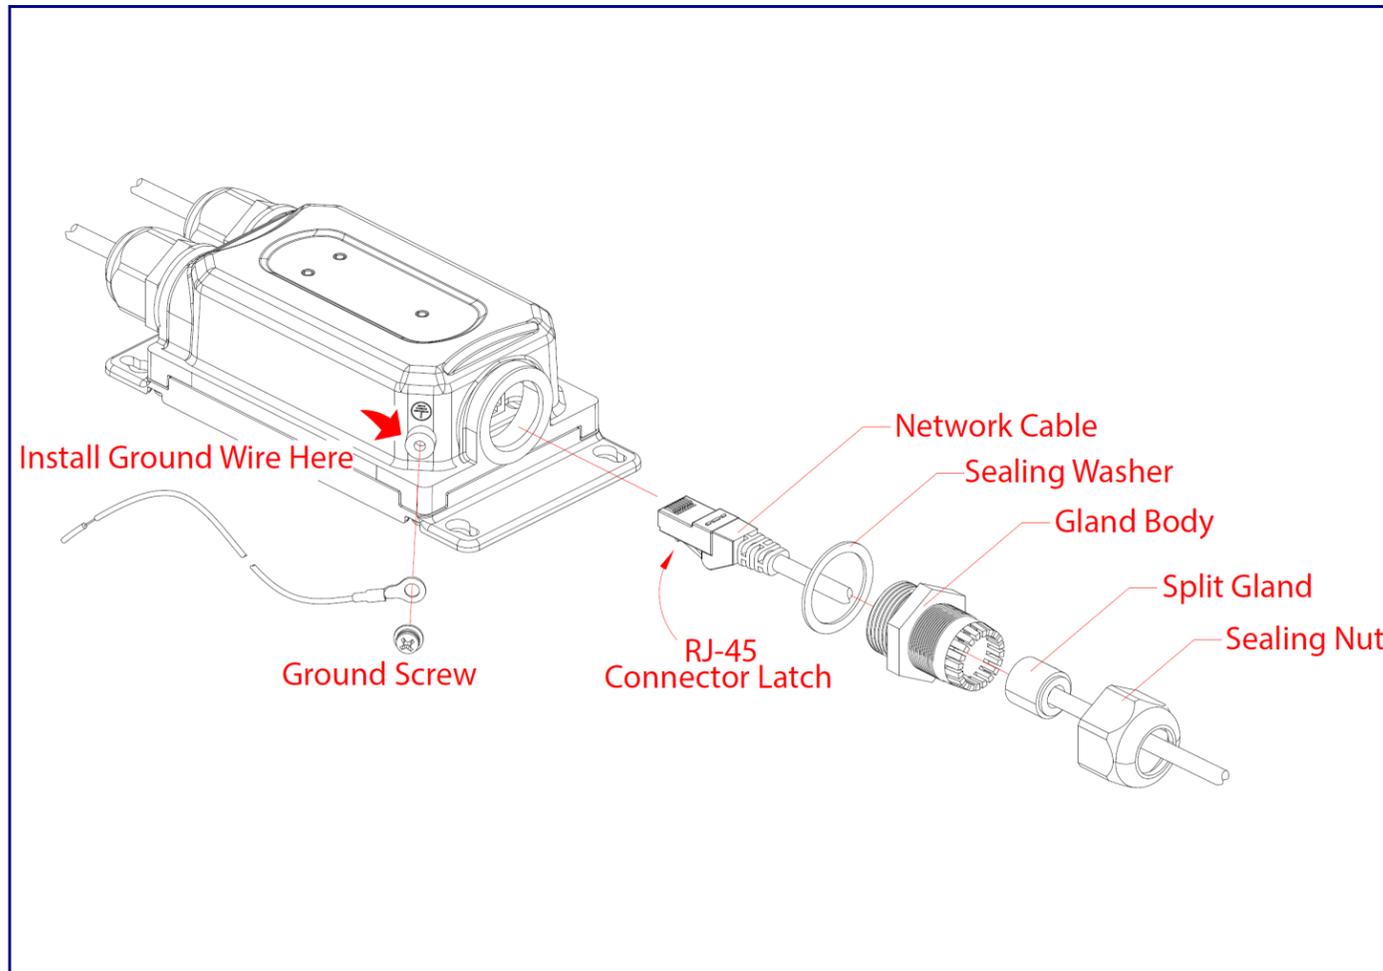

Powering on the IP67

The switch is powered by an 802.3bt or 802.3at network switch or Injector. Below is a chart that describe the input and output details.

Power Chart

Input	Corresponding Output
802.3bt Type 4 (90W)	each 802.3at output port supports up to 29.5W
802.3bt Type 3 (60W)	802.3at output port 1 supports 29.5W and 802.3at output port 2 supports 25W
802.3at (25.5W)	each 802.3at output port supports 10W

LED Function

