

The CyberData InformaCast Enabled IP66 Outdoor Horn is for use with Singlewire's InformaCast paging and emergency notification software.

The Horn connects into local area networks with a single CAT5/6 cable from your PoE switch and provides an easy method for implementing a loud IP-based overhead paging system for loud areas, warehouses, manufacturing areas, and outdoor areas.



Features



- Compatible with Singlewire InformaCast v12.1, including support for downloading SIP credentials from InformaCast
- Supports Singlewire InformaCast High Quality Audio
- Concurrent InformaCast, SIP and multicast
- Paging prioritization
- Support for 10 multicast paging groups
- Supports user-uploadable ring tones and up to ten stored messages
- Support for security code to prevent unwanted SIP calls
- Can receive pages directly from Poly phones as well as other devices that can send standard multicast
- Loud/Night Ringer function - second SIP extension
- Supports delayed pages with call buffering
- Digital volume control
- Sealed network cable gland
- TLS 1.2 and SRTP enhanced security for IP endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS or HTTP web-based configuration. HTTPS is enabled by default
- 802.11q VLAN tagging
- Configurable event generation for device health and status monitoring
- Web-based upgradeable firmware
- Support for multiple SIP servers for redundancy
- Support for Cisco SRST resiliency

Specifications


Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Notification Software	Singlewire InformaCast v4.0 and above
Power Input	PoE 802.3at or 802.3af
Audio Output	802.3at: 107.7 (+/- 0.2) dBC @ 1M and 1kHz 802.3af: 104.8 (+/- 0.2) dBC @ 1M and 1kHz
Payload Types	G.711 a-law, G.711 μ-law, G.722, G.729
Network Security	TLS/SSL 1.2 and SRTP
IP Rating	IP66
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	Length: 14.404 in. [366 mm] Width: 10.630 in. [270 mm] Height: 6.772 in. [172 mm] (without stand) Height: 9.291 in. [236 mm] (with stand)
Weight	6.6 lbs. [3.00 kg]
Boxed Weight	8.8 lbs. [3.99 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 Years Limited
Part Number	011472

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

InformaCast® Enabled IP66 Outdoor Horn

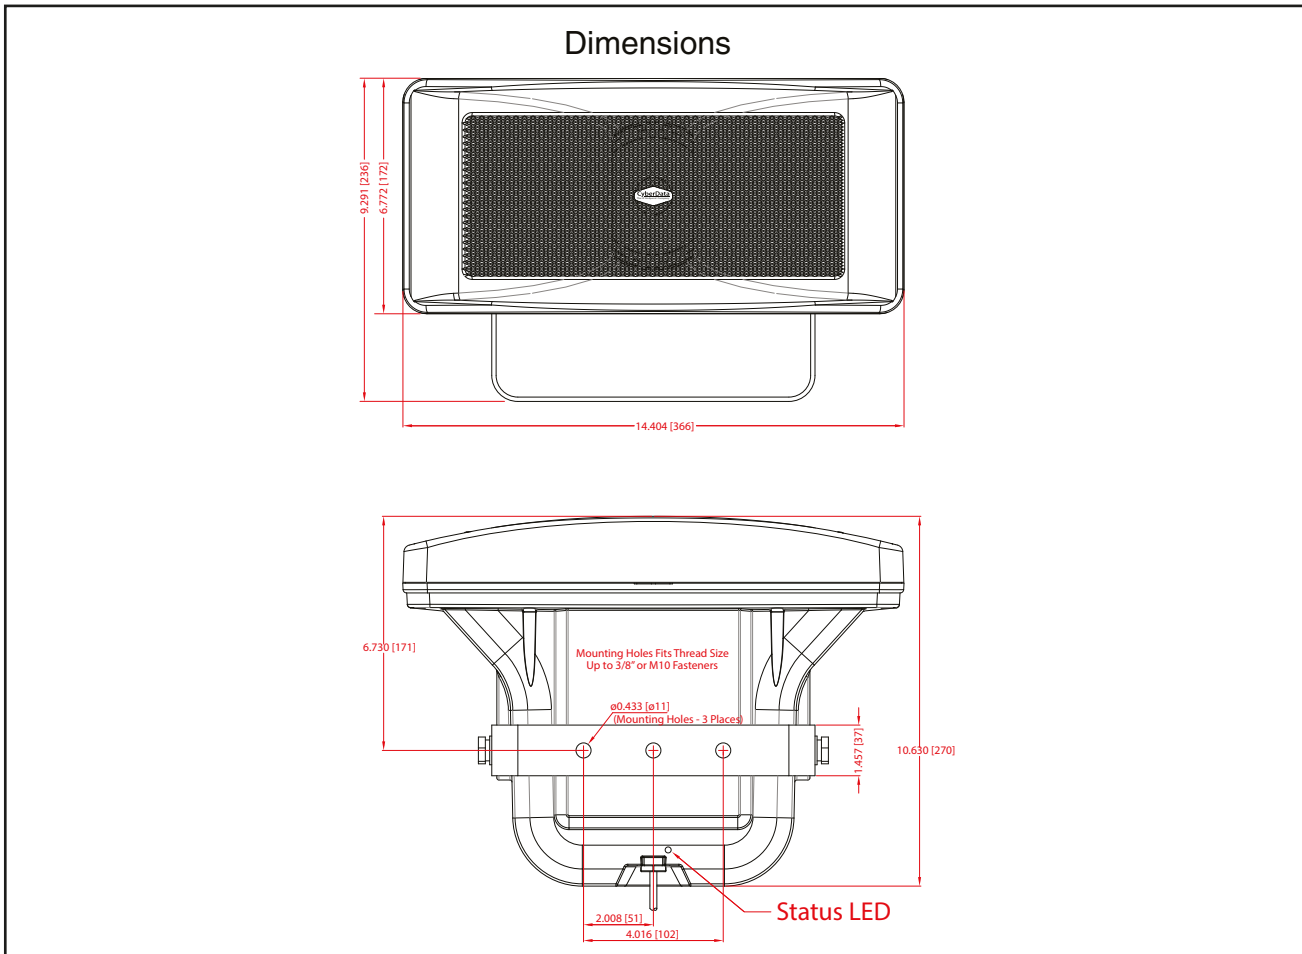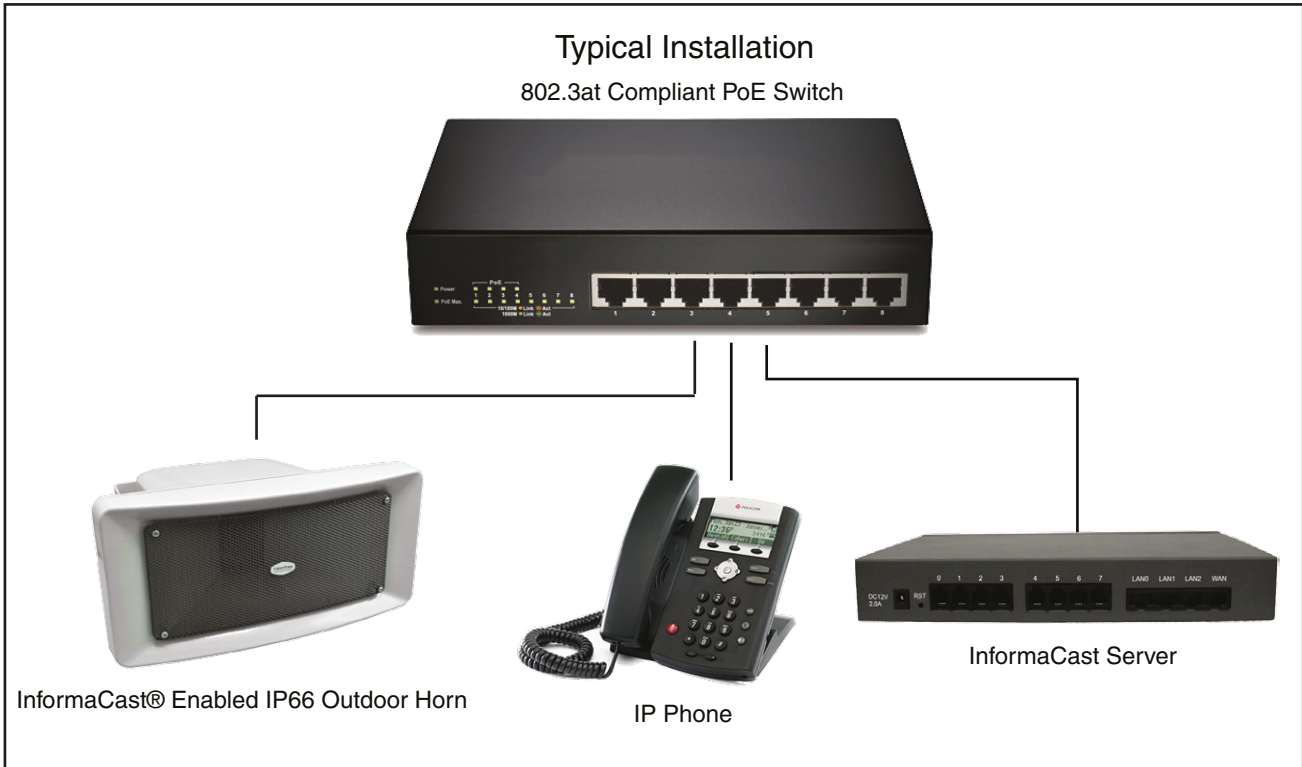

InformaCast® Enabled IP66 Outdoor Horn

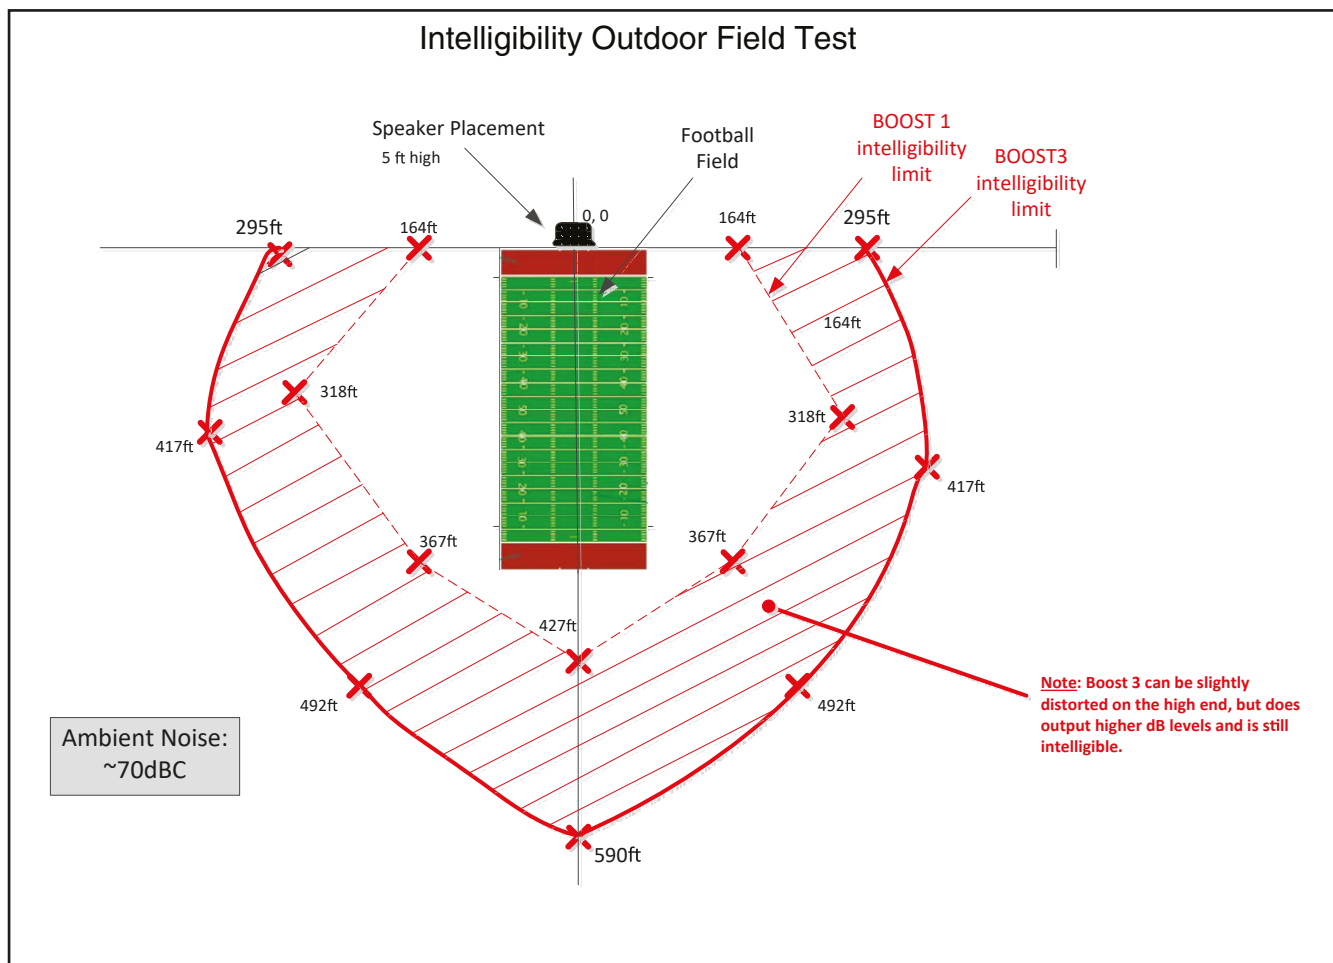

Related Products:



011446 Multicast
VoIP Microphone



011146 SIP Paging Server
with Bell Scheduler



011124 PoE Power
Injector 802.3at