

DS-KH8340-TCE2 Two-Wire Indoor Station with 7" Touch Screen



- Hands-Free Audiovisual Communication with the Door Station and the Master Station in the Intercom System
- Supports the Monitoring of Door Stations and External Cameras
- Supports Auto-Answering and Do Not Disturb Mode
- Noise Suppression and Echo Cancellation
- Supports 8-ch Zone Alarm Input
- Supports Panic Call
- Remote Unlocking via the Client
- Convenient Installation and Easy Operation

The DS-KH8340-TCE2 by Hikvision is a two-wire indoor station with a 7" touch screen. It is compact, convenient, and easy to install.

It supports hands-free communication with door and master stations.

The system supports up to a total of five outdoor and indoor stations, with a maximum of two outdoor stations).

Available Models:

DS-KH8340-TCE2

Œ


FC



Specifications

	DS-KH8340-TCE2
System Parameters	
Processor	High-performance embedded SOC processor
Display Parameters	
Display Screen	7" colorful TFT LCD
Display Resolution	
	Capacitive touch screen, touch button
Operation Interface	Flattened UI operation interface
Video Parameter	
Video Compression Standard	H.264
Audio Parameters	
	Built-in omnidirectional microphone
	Built-in loudspeaker
Audio Quality	Noise suppression and echo cancellation
Device Interfaces	
Network Interface	Two-wire interface
	1 RS-485 half-duplex port
Alarm Output	1
General	
Power Supply	
Power Consumption	≤10 W
Working Temperature	14° to 131° F (-10° to 55° C)
Working Humidity	10% to 90% non-condensing
Installation	Wall mounting
Dimensions (L x W x H)	7.72" x 5.24" x 1.01" (196 mm x 133 mm x 25.75 mm)

Appearance and Interfaces

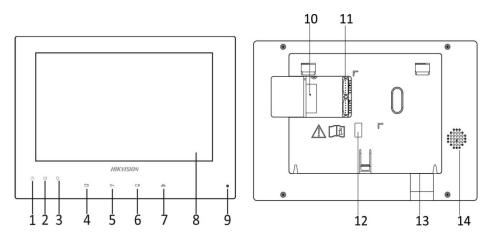

1.	Power Supply Indicator
2.	Information Indicator
3.	Alarm Indicator
4.	Call Accept/Decline Key
5.	Unlock Key
6.	Live View Key
7.	Management Centre Key
8.	LCD Display Screen
9.	Microphone
10.	Two-Wire Interfaces
11.	Terminals
12.	Serial Port
13.	TF Card Slot
14.	Loudspeaker



Typical Application

